


25,7 hp

Frame	ACTIO™ integral oscillating frame • Steering wheels • Four equal-size driving wheels
Engine type	3800 | YANMAR - Direct injection diesel Stage 5 - 3 Cylinders - 1331 cc Power 18.9 kW / 25.7 hp - 2800 rpm Max torque 86.8 Nm at 1300 rpm
Transmission	Mechanical gearbox with 12 speeds, 8 forward and 4 reverse
Power take-off	Standard at 540 rpm and synchronised with all gearbox speeds
Hydraulic system	Hydraulic system consisting of a single-acting remote valve for lifting the loading bed, complete with safety devices
Brakes	Dual-circuit hydraulic brakes acting on all 4 wheels
Weight	With load platform (Kg): 1515
Loading Bed Dimensions	Loading bed (mm): 2200x1400x300

DIMENSIONS WITH STANDARD WHEELS: 8,0/75-15 6PR

	A	B	C	D	E	G	I	L
3800	3905÷4035	945	2190	770÷900	820	230	2160	1400

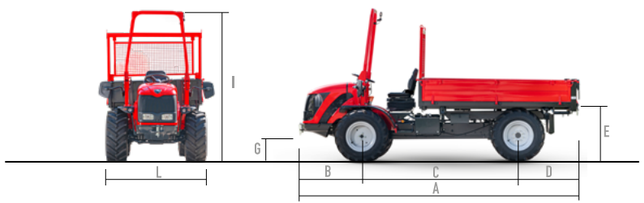





TRANSMISSION
8+4

EXG
MAXIMUM
PROTECTION
GUARANTEE

5
STAGE